

# 2000W Modified Sine Wave DC - AC Power Inverter


## Inverter Expert **CAR Series - CAR2K**



### FEATURES: ■

- I/P voltage:** 12V DC or 24V DC or 48V DC ◀
- Output voltage:** 100/110/120V AC or 220/230/240V AC ◀
- Output frequency:** 50/60Hz ± 3 ◀
- I/P protections:** Bat.Low alarm; Bat.Low shutdown; Over voltage; Polarity reverse ◀
- O/P protections:** Over load; Short circuit; Earth fault; Over temperature; Soft start ◀
- Output waveform:** Modified Sine Wave ◀
- Design:** High frequency design ◀
- Topology:** Microprocessor ◀
- No load current draw:** Low power consumption (standby) ◀
- In front panel:** With power ON/OFF switch and LED indicator ◀
- ON/OFF remote control:** optional ◀
- Cooling fan:** Load controlled or temperature controlled cooling fan (optional) ◀

### Output Receptacle (optional)



### ■ SPECIFICATION:

Model	CAR2K-121	CAR2K-122	CAR2K-241	CAR2K-242	CAR2K-481	CAR2K-482	
Output	AC Voltage	110V	230V	110V	230V	110V	230V
	AC Voltage Range	100~120V AC	220~240V AC	100~120V AC	220~240V AC	100~120V AC	220~240V AC
	AC Regulation	± 10%					
	Rated Power	2000W					
	Peak Power	4000W(few seconds)					
	Waveform	Modified Sine Wave					
	Frequency	50/60Hz ± 3					
	USB Port	5V 500mA(optional)					
	LED Indicator	Green for power on, Red for power failure / protection status					
Input	DC Current	200A		100A		50A	
	No Load Current Draw	1.1A		1.1A		1.1A	
	DC Voltage	12V		24V		48V	
	Voltage Range	9.5~16V DC		19~32V DC		38~64V DC	
	DC Connector	BVR10 battery clip * 2ea		BVR10 battery clip * 1ea		BVR6 battery clip * 1ea	
	Protection	Efficiency	≥90%				
Low Voltage Alarm		11 ± 0.5V DC		22 ± 1V DC		44 ± 1V DC	
Low Voltage Shutdown		9.5 ± 0.5V DC		19 ± 1V DC		38 ± 1V DC	
Reset Voltage after L. V. S		11.5V~12V DC		23~24V DC		46~48V DC	
Overload		Shut off o/p, re-power to recover					
Over Voltage		15 ± 0.5V DC		30 ± 1V DC		60 ± 2V DC	
Over Temperature		45 ± 5°C/113 ± 9 °F					
Output Short-circuit		Shut off o/p, when output is short circuit					
Reverse Polarity		By fuse open					
Replaceable Fuse		30A*8		15A*8		7.5A*8	
Soft Start		Yes, 3~5's					
Earth Fault	Shut off o/p when the load has electric leakage						
Environment	Working Temp.	0~30°C @ 100% load; 40°C @50% load					
	Working Humidity	20%~90% RH non-condensing					
	Storage Temp., Humidity	-30~+70°C/-22~+158°F, 10~95%RH					
	Temp. Coefficient	± 0.05%(0~50°C)					
Safety&EMC	Isolation Resistance	I/P-O/P:100M Ohms/500VDC/25°C/70%RH					
	EMI Conduction&Radiation	Compliance to EN55022 class B, 72/245/CEE, 95/54/CE					
	EMS Immunity	Compliance to EN61000-4-2,3					
	LVD	Compliance to EN60950					
	E-mark	E8 10R-02 0633					
Other	Remote Control	optional(switch with 5m wire)					
	MTBF	37khrs min. MIL - HDBK - 217(25°C)					
	N.W/unit	4900g					
	Dimension(cm)	34.5*23*10.8(L*W*H)					
	Packing	Blister card/gift box, 2 units/12.5Kg/Ctn(40*31.5*38cm)					
	Output Receptacle	A, B, C, D, E, F, G, H, I, J, K, L, M, N(optional)					
Applications	Home appliance, power tools, office and portable equipment and vehicle...etc.						


Note: Specification prior to change without notice

# 2000W Modified Sine Wave DC - AC Power Inverter

## Inverter Expert **CAR Series - CAR2K**

### MECHANICAL SPECIFICATION:

Unit: mm

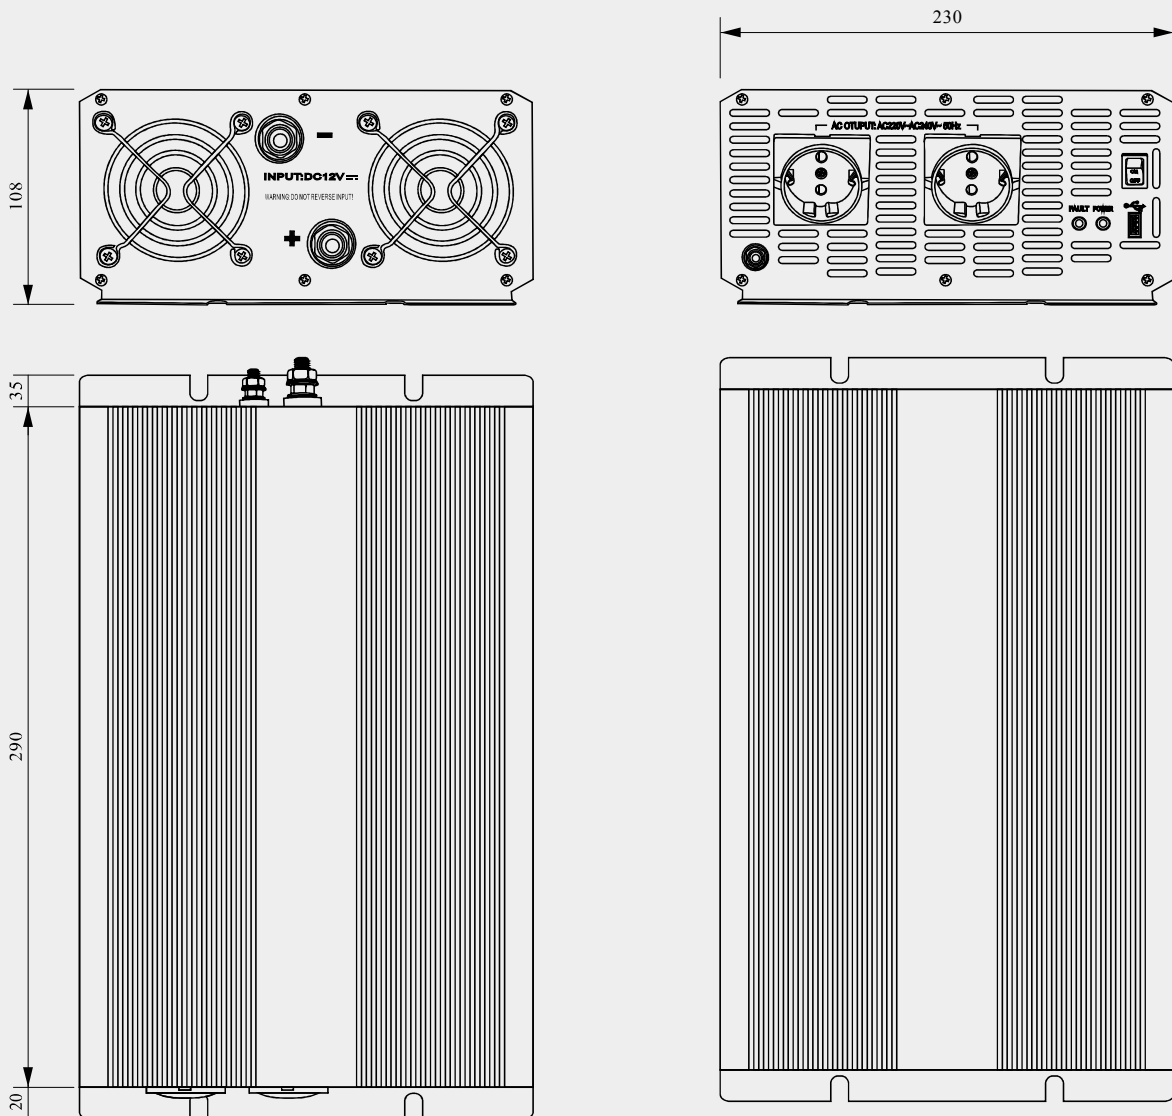

### Output Receptacle (optional)

