


# KPCM - 6B ,KPCM - 6B- P(6.0X5.2)

UNIT:mm



## Dimensions

Lead Wire Type KPCM - 6B PCB Type KPCM - 6B-P

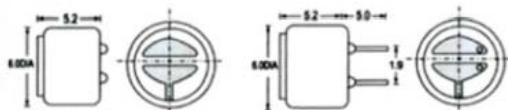


## Specifications

Sensitivity	:See Model No. Table
Impedance	:2.2K $\Omega$ Max
Standard Power Supply	:2.0V DC
Current Consumption	:0.5mA Max
Sensitivity Reduction	:within-3dB at 1.0V
S/N Ratio	:more than 60dB
Directivity	:Omnidirectional

Sensitivity (0dB=1v/ub at 1kHz)	Sensitivity show method
-70 $\pm$ 2dB	As 1 pa=10ub, therefore when it be pa or ub showed, there would be -20ub distance between them.
-68 $\pm$ 2dB	
-66 $\pm$ 2dB	
-64 $\pm$ 2dB	
-62 $\pm$ 2dB	For examples:
-60 $\pm$ 2dB	-40dB(0dB=1v/pa)is equivalent to
-58 $\pm$ 2dB	-60dB(0dB=1v/ub)

## Schematic

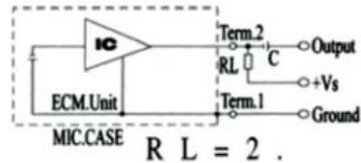

$$R L = 2 . 2 K \Omega$$

$$V_s = 2V$$

## Frequency Response

