


Valve Regulated Lead-Acid Battery



Model: BT-12M28AC(W)(12V28AH)

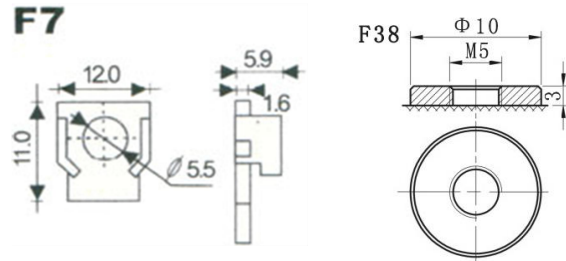

Application

- ☆ Measuring equipment and instrument
- ☆ Telephone sets
- ☆ Lighting equipment
- ☆ Security systems


General Features

- ☆ Designed floating charging service life: 8 years (25°C)
- ☆ Sealed and maintenance free operation
- ☆ Safety valve installation for explosion proof
- ☆ Low self-discharge characteristic
- ☆ Wide operating temperature range from 0°C-40°C
- ☆ Lead Aluminum calcium Tin alloy high energy, prevent corrosion


PHYSICAL SPECIFICATIONS		
Nominal Voltage		
	12V	
Nominal Capacity (20HR)		
	28AH	
Dimensions	Length	174±2mm
	Width	166±2mm
	Container height	126±2mm
	Total Height (with terminal)	126±2mm
Weight±3%		
	Approx 8.06Kg(17.77lbs)	
Internal Resistance(In full charge status)		
	≈8.00mΩ	
Standard Terminals		
	F7/F38 (standard)	

Constant – Voltage Charge	
Cycle application	<ol style="list-style-type: none"> 1. Limit initial current less than 7.0A. 2. Charge until battery voltage (under charge) reaches 14.1V to 14.4V at 25°C (77F) . 3. Hold at 14.1V to 14.4V until current drop to under 0.168A for at least 3 hours. 4. Temperature compensation coefficient of charging voltage is -30mV/°C.
Standby service	<ol style="list-style-type: none"> 1. Hold battery across constant voltage source of 13.6to 13.8 volts with current limit 7.0A continuously .When held at this voltage , the battery will seek its own current level and maintain itself in a fully charge status. 2. Temperature compensation coefficient of charging voltage is -18mV/°C
NOTE : The battery should be charged within 6 months of storage ,Otherwise , permanent loss of capacity might occur as a result of sulfation	


Charge Characteristics

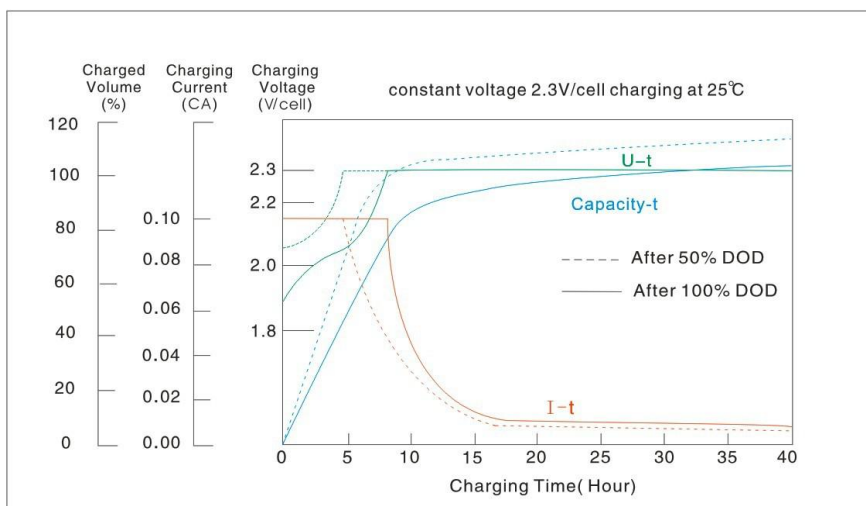

Discharge Current & Discharge Duration Time (25°C/77°F)

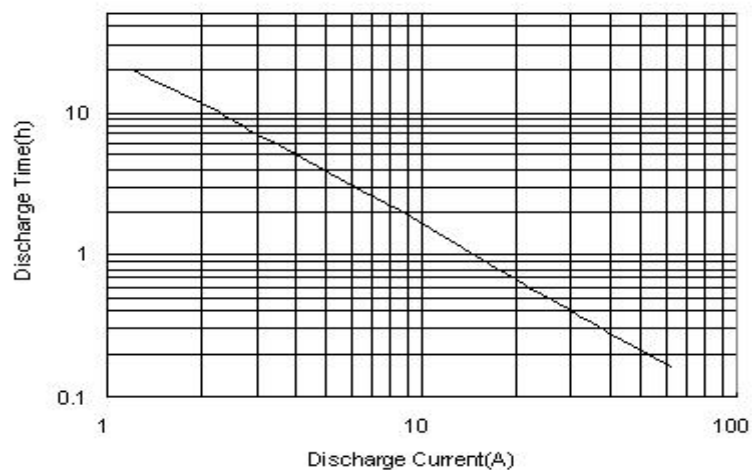


Discharge Characteristic (25°C/77°F)

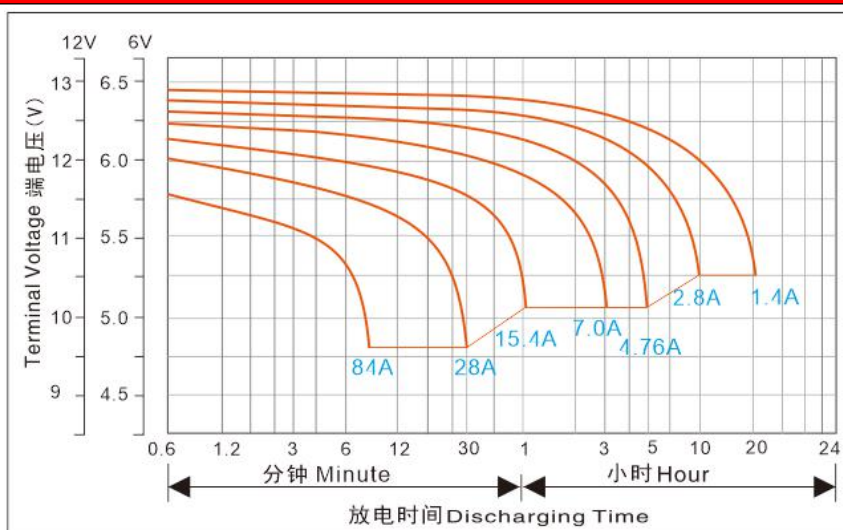


ELECTRICAL SPECIFICATIONS		
Rated Capacity	20 hour rate(1.40A)	28.0AH
	10 hour rate(2.8A)	26.8AH
	5 hour rate(4.76A)	23.5AH
	27 minute rate (28A)	14.0AH
	7 minute rate (84A)	9.80AH
Capacity affected by Temperature (20Hour Rate)	40°C(104°F)	103%
	25°C(77°F)	100%
	0°C(32°F)	86%

Constant Current Discharge Data Sheet (Amperes at 25°C)													
End Voltage	Minute (M)					Hour (H)							
	5	10	15	30	45	1	1.5	2	3	5	8	10	20
10.20	103.9	67.6	53.0	27.1	19.6	16.9	13.41	9.97	7.52	4.81	3.22	2.73	1.45
10.50	103.0	67.1	52.5	26.8	19.4	16.7	13.17	9.59	7.28	4.74	3.20	2.71	1.43
10.80	102.0	66.3	52.0	26.5	19.1	16.6	12.92	9.22	7.04	4.64	3.16	2.66	1.40

Constant Power Discharge Data Sheet (Watt at 25°C)													
End Voltage	Minute (M)					Hour (H)							
	5	10	15	30	45	1	1.5	2	3	5	8	10	20
10.20	1126	812	657	371	271	206	157.9	118.8	84.78	55.88	39.36	31.85	17.15
10.50	1079	785	638	364	264	203	155.6	117.1	82.86	55.24	39.04	31.37	16.91
10.80	1023	756	617	353	258	199	153.3	115.4	81.43	54.60	38.64	30.85	16.67

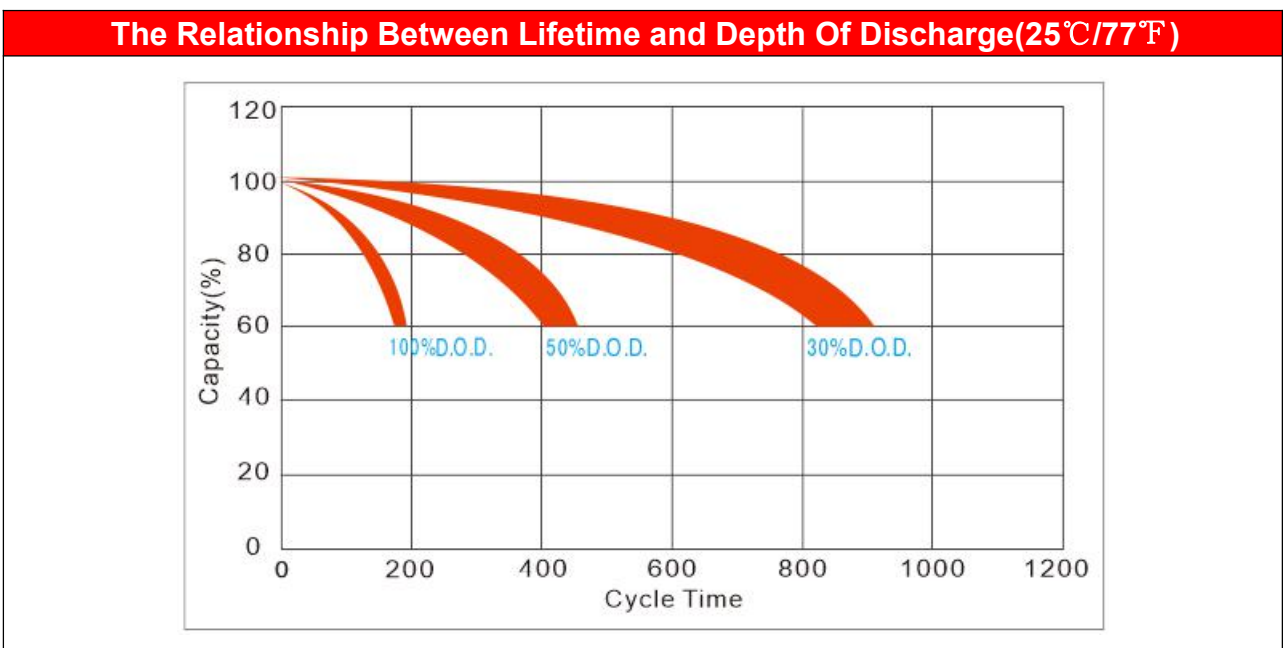

Capacity Curve at Different Temperature

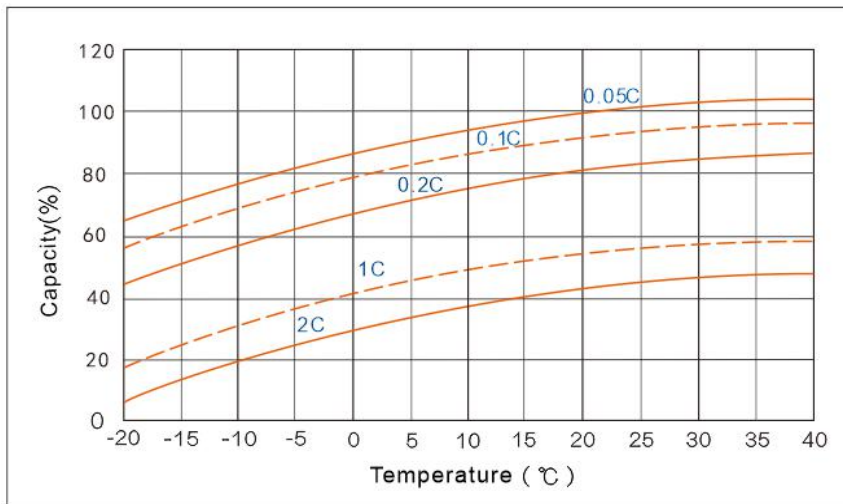

Storage Characteristics

